




Since 1954

Enclosed Cargo Trailers

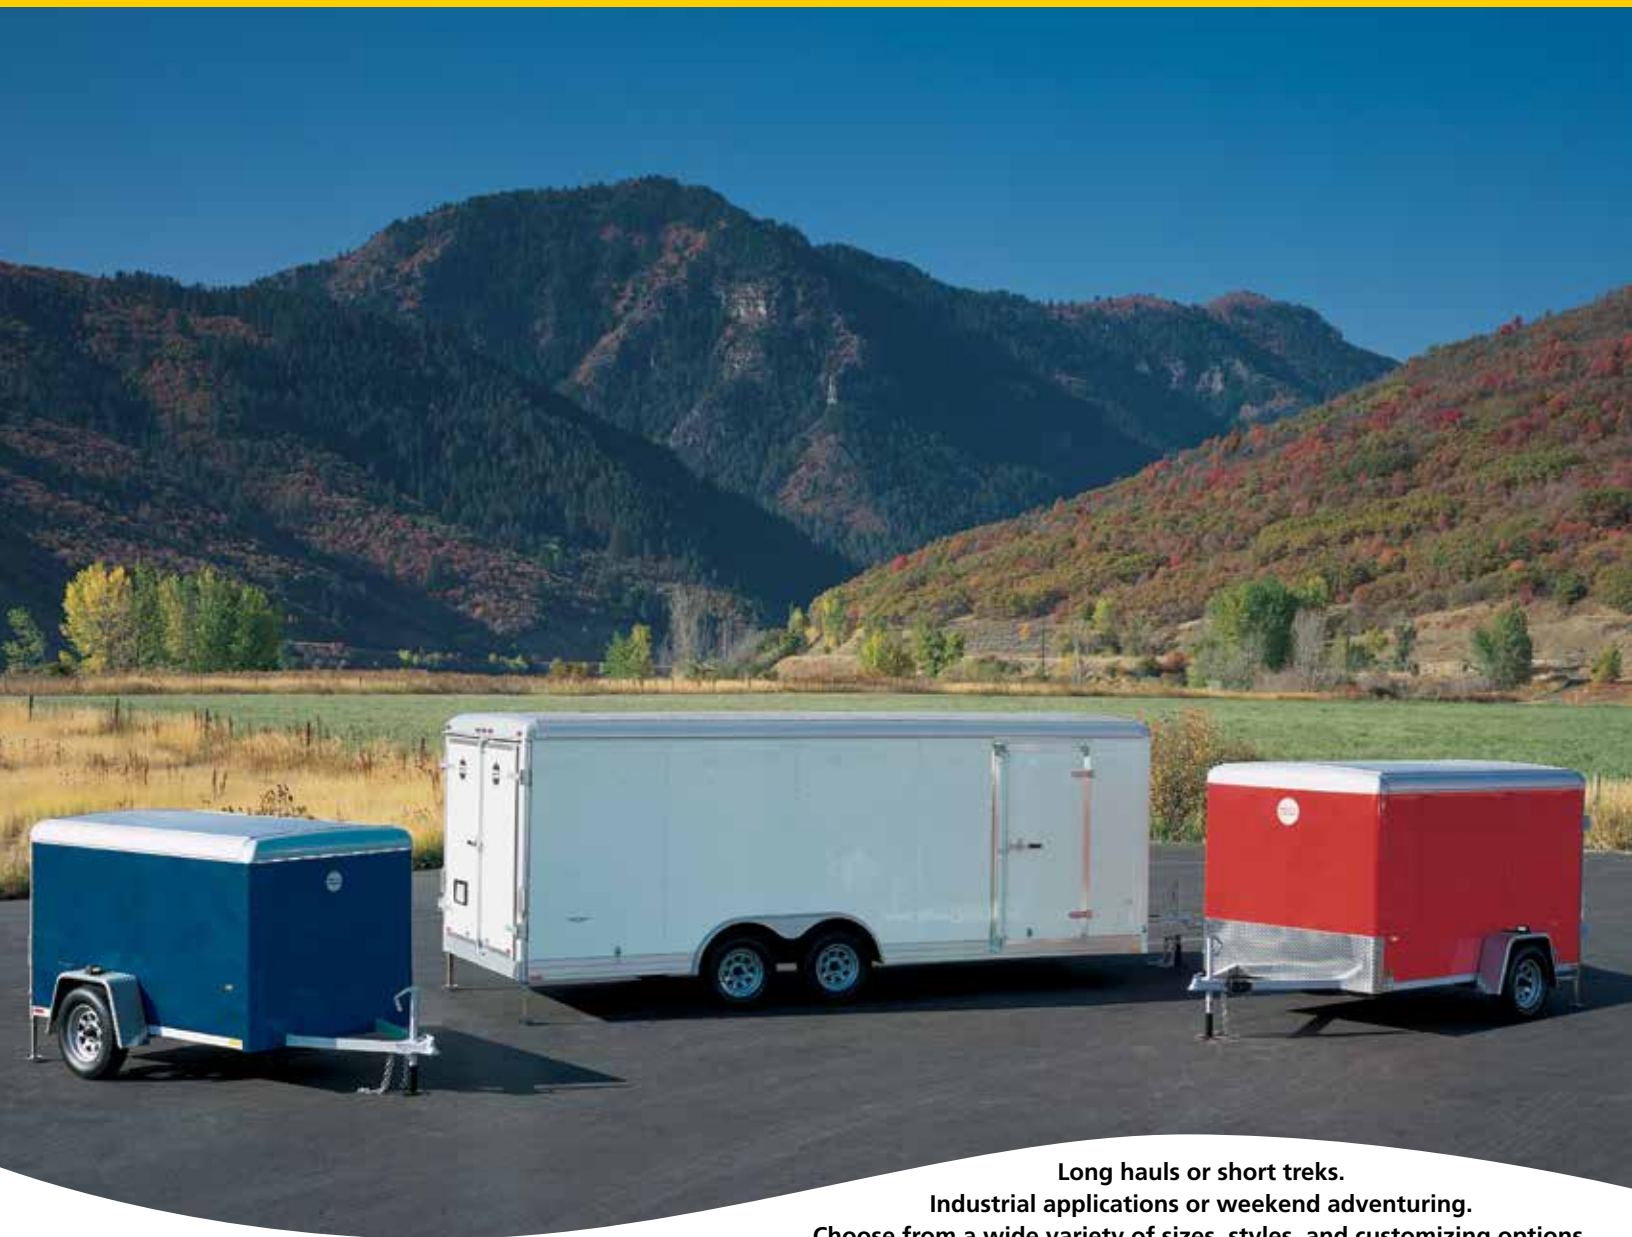


Long hauls or short treks.

Industrial applications or weekend adventuring.

Choose from a wide variety of sizes, styles, and customizing options.
Designed, engineered, and manufactured by the most respected name
in the cargo trailer industry — Wells Cargo.

With a Wells Cargo Behind . . . You Never Look Back!™

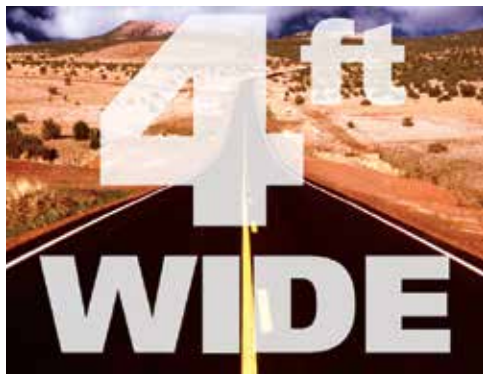

Mini Wagon®

2

Small in size. Big on brawn.

The Mini Wagon is the perfect companion for weekend road trips or daily small business hauling needs. It's just 4' wide and 6' long, but don't let the small size fool you. It has all the same tough construction you'll find in our bigger commercial grade trailers. Designed to fit comfortably behind today's popular Minivans and SUV's, the Mini Wagon's compact size and low profile deliver unparalleled towability. You'll hardly notice it's behind you, except for the look of envy from passersby. To top things off, the Mini Wagon features a high impact thermo-polymer roof. In the case of a Wells Cargo Mini Wagon . . .

"Good things do come in small packages!"





SPECIFICATIONS Mini Wagon®

MODEL	MW6
Body Length	6'0"
Body Width	4'0"
Overall Length	9'2"
Overall Width <i>(Includes Fenders)</i>	5'10"
Overall Height	5'7"
Interior Length	5'9"
Interior Width	3'9"
Interior Height	4'0"
Platform Height	17"
Axles	Single
Axle Type	6" Drop
Suspension	Torflex®
Tire Size	15"
Load Range	C
Wheel Bolt Pattern	5-Bolt/4.5
Hitch Ball Size	2"
Hitch to Top of Ball	19"
Hitch Weight <i>(% of Curb Weight)</i>	10-15%
Curb Weight <i>(lb.)</i>	600
GVWR <i>(lb.)</i>	2200
GAWR <i>(lb.)</i>	2000
Average Payload Capacity <i>(lb.)</i>	1600
Cubic Capacity <i>(Cubic Ft.)</i>	86
Rear Door Style	Single
Rear Door Opening Width	40 1/2"
Rear Door Opening Height	38"

Specifications and features subject to change without notice.



STANDARD FEATURE CHECKLIST:

- ☐ .030 Prefinished Smooth Aluminum Exterior Bonded (No Screws)
- ☐ All Aluminum "Anti-Rack" Cam Lock with Stainless Steel Hasp
- ☐ Extruded Aluminum Bottom Trim with Anodized Finish
- ☐ Torflex® Rubber Torsion Axles with E-Z Lube Hubs
- ☐ 16" Aluminum Tread Plate Stoneguard
- ☐ 5-Bolt Silver Spoke Wheels (E-Coated)
- ☐ One-piece, Thermo-Polymer Roof
- ☐ 12v Dome Light (1) with Wall Switch
- ☐ 12v End Connector (4-way plug)
- ☐ D.O.T. Safety Chains with Hooks
- ☐ Wells Cargo LED Safety Package
- ☐ Aluminum Tread Plate Fenders
- ☐ 1/4" Plywood Interior Sidewall
- ☐ Jack Ram Hoist with Sand Pad
- ☐ 2" Positive Lock Ball Coupler
- ☐ 3/4" Plywood Flooring
- ☐ LED Exterior Lighting
- ☐ Single Rear Door
- ☐ 15" Radial Tires



OPTIONS



Side Vents




Vice Lock Style Door Hasp



Floor Tie-Downs with Backing Plate



Power Jack and Exterior Mounted Spare Tire

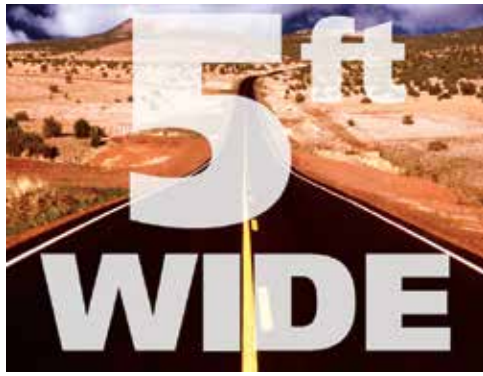

Service Wagon®

4

Ready to roll . . . Work or play!

The user-friendly Service Wagon is eager to please and ready to follow. Just hitch this agile trailer to the back of almost any sized tow vehicle and you're ready to tackle the most formidable "to do" list. Whether it's camping gear for the scout troop, supplies for your catering business, or tools for the job site, the Wells Cargo Service Wagon is up to the challenge. And, just like the larger trailers in our cargo trailer line, the Service Wagon doesn't skimp on quality. You can tell by our advanced design, top-notch components, and fit & finish that we're serious about our position as the industry leader. Turn to Wells Cargo if you're serious about getting a great value.



OPTIONS



Desk Light



Access Doors



12-Volt Utility Light (Exterior)




Spray-On Floor & Sidewall Liner



SPECIFICATIONS Service Wagon®

MODEL	SW8	SW10
Body Length	8'6"	10'0"
Body Width	5'0"	5'0"
Overall Length	12'0"	13'6"
Overall Width <i>(Includes Fenders)</i>	6'10"	6'10"
Overall Height	6'9"	6'9"
Interior Length	8'3"	9'9"
Interior Width	4'9"	4'9"
Interior Height	5'0"	5'0"
Platform Height	18"	18"
Axles	Single	Single
Axle Type	4" Drop	4" Drop
Suspension	Torflex®	Torflex®
Tire Size	15"	15"
Load Range	C	C
Wheel Bolt Pattern	5-Bolt/4.5	5-Bolt/4.5
Hitch Ball Size	2"	2"
Hitch to Top of Ball	17"	17"
Hitch Weight <i>(% of Curb Weight)</i>	10-15%	10-15%
Curb Weight <i>(lb.)</i>	820	880
GVWR <i>(lb.)</i>	2750	2750
GAWR <i>(lb.)</i>	2500	2500
Average Payload Capacity <i>(lb.)</i>	1930	1870
Cubic Capacity <i>(Cubic Ft.)</i>	195	231
Rear Door Style	Double	Double
Rear Door Opening Width	52½"	52½"
Rear Door Opening Height	51"	51"

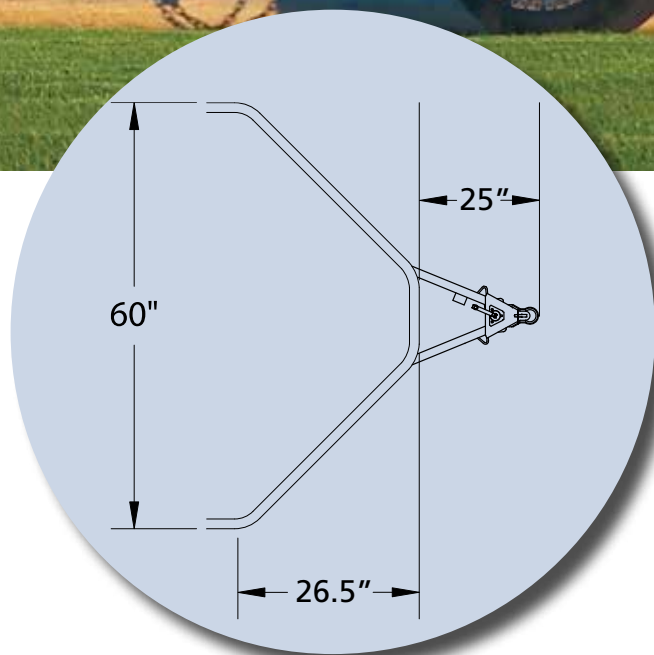


Service Wagon® V-FRONT SPECS	
SPECIFICATION CATEGORY	INCREASES STANDARD MEASUREMENT BY:
Body Length	+26.5"
Overall Length	+9.5"
Curb Weight:	+80 lb.

STANDARD FEATURE CHECKLIST:

- ☐ Torflex® Rubber Torsion Axles with E-Z Lube Hubs
- ☐ 15" Radial Tires
- ☐ 5-Bolt Silver Spoke Wheels (E-Coated)
- ☐ Double Rear Doors
- ☐ One-piece Seamless Aluminum Roof
- ☐ Aluminum Tread Plate Fenders
- ☐ 24" Aluminum Tread Plate Stoneguard
- ☐ .030 Prefinished Smooth Aluminum Exterior Bonded (No Screws)
- ☐ 12v Dome Lights (2) with Wall Switch
- ☐ LED Exterior Lighting
- ☐ Wells Cargo LED Safety Package
- ☐ Extruded Aluminum Bottom Trim with Anodized Finish
- ☐ Extruded Aluminum Roof Cover/Drip Rail with Anodized Finish
- ☐ All Aluminum "Anti-Rack" Cam Lock with Stainless Steel Hasp
- ☐ 1/4" Plywood Interior Sidewall
- ☐ 3/4" Plywood Flooring
- ☐ 12v End Connector (4-way plug)
- ☐ Jack Ram Hoist with Sand Pad
- ☐ 2" Positive Lock Ball Coupler
- ☐ D.O.T. Safety Chains with Hooks

Specifications and features subject to change without notice.

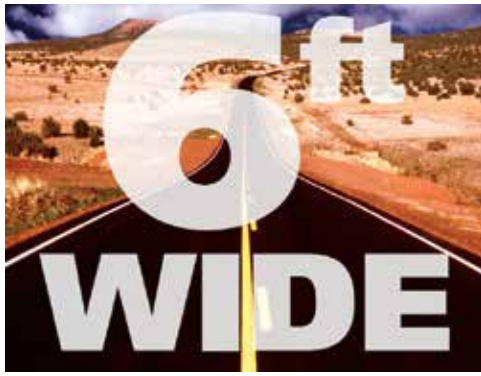

Single Axle Tote Wagon®

Doesn't Mind Working Overtime

Business or pleasure, short jaunts or long treks, the Tote Wagon is the "go to" trailer of choice. In fact, if there was an award for the **MVT** (Most Versatile Trailer), the Wells Cargo Tote Wagon would win hands down. This multi-purpose six footer is an uncompromising blend of solid engineering, built-in durability, and everyday utility. The streamlined body silhouette and independent rubber torsion suspension system deliver unsurpassed road stability. Wherever you go your Tote Wagon will follow . . . no need to look back. We've also given a high priority to reducing maintenance and retaining resale value. You have more important things to do with your time than pamper your trailer.



Features optional equipment available at additional charge.






Features optional equipment
available at additional charge.

SPECIFICATIONS Single Axle Tote Wagon®

MODEL	TW101	TW121	TW141
Body Length	10'0"	12'0"	14'0"
Body Width	6'0"	6'0"	6'0"
Overall Length	14'0"	16'0"	18'0"
Overall Width (Includes Fenders)	7'10"	7'10"	7'10"
Overall Height	7'8"	7'8"	7'8"
Interior Length	9'9"	11'9"	13'9"
Interior Width	5'9"	5'9"	5'9"
Interior Height	6'0"	6'0"	6'0"
Platform Height	18"	18"	18"
Axles	Single	Single	Single
Axle Type	4" Drop	4" Drop	4" Drop
Suspension	Torflex®	Torflex®	Torflex®
Tire Size	15"	15"	15"
Load Range	C	C	C
Wheel Bolt Pattern	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5
Hitch Ball Size	2"	2"	2"
Hitch to Top of Ball	17"	17"	17"
Hitch Weight (% of Curb Weight)	10-15%	10-15%	10-15%
Curb Weight (lb.)	990	1200	1400
GVWR (lb.)	2990	2990	2990
GAWR (lb.)	2990	2990	2990
Average Payload Capacity (lb.)	2000	1790	1590
Cubic Capacity (Cubic Ft.)	336	405	474
Rear Door Style	Double	Double	Double
Rear Door Opening Width	64½"	64½"	64½"
Rear Door Opening Height	63"	63"	63"

Specifications and features subject to change without notice.

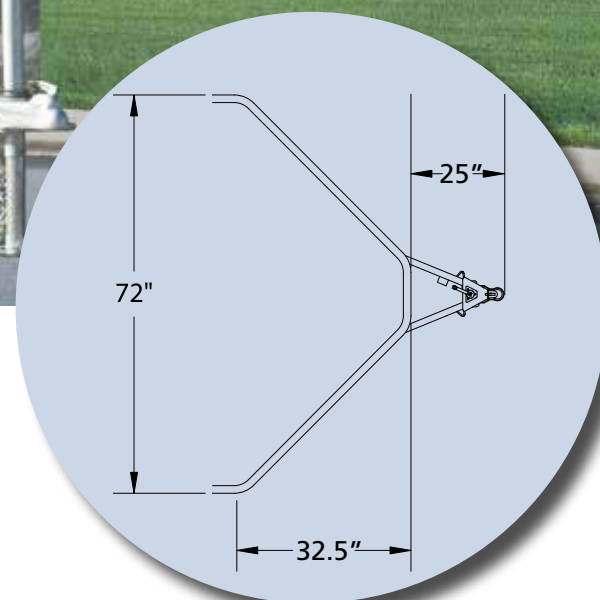


Tote Wagon® V-FRONT SPECS

SPECIFICATION CATEGORY	INCREASES STANDARD MEASUREMENT BY:
Body Length	+32.5"
Overall Length	+9.5"
Curb Weight:	+120 lb.

STANDARD TW FEATURE CHECKLIST:

- ☐ Torflex® Rubber Torsion Axles with E-Z Lube Hubs
- ☐ 15" Radial Tires
- ☐ 5-Bolt Silver Spoke Wheels (E-Coated)
- ☐ Double Rear Doors
- ☐ Radius Pre-Framed Side Entry Door with Flush Lock & Dead Bolt
- ☐ One-piece Seamless Aluminum Roof
- ☐ 24" Aluminum Tread Plate Stoneguard
- ☐ Aluminum Tread Plate Fenders
- ☐ .030 Prefinished Smooth Aluminum Exterior Bonded (No Screws)
- ☐ 12v Dome Lights (2) with Wall Switch
- ☐ LED Exterior Lighting
- ☐ Wells Cargo LED Safety Package
- ☐ Extruded Aluminum Bottom Trim with Anodized Finish
- ☐ Extruded Aluminum Roof Cove/Drip Rail with Anodized Finish
- ☐ All Aluminum "Anti-Rack" Cam Lock with Stainless Steel Hasp
- ☐ 1/4" Plywood Interior Sidewall
- ☐ 3/4" Plywood Flooring
- ☐ 12v End Connector (4-way plug)
- ☐ Jack Ram Hoist with Sand Pad
- ☐ 2" Positive Lock Ball Coupler
- ☐ D.O.T. Safety Chains with Hooks

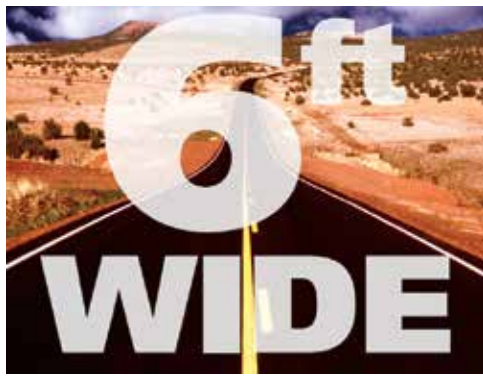

Tandem Axle Tote Wagon®

8

All Around...All Purpose...All American!

There's more than one way to tackle a tough job. If capacity is an issue, step up to a tandem axle Tote Wagon. These durable models have 4-wheel electric brakes, a reinforced A-frame with center tube, and a roomy 6' of interior headroom as standard equipment.



*Features optional equipment
available at additional charge.*

MODEL	TW122	TW142	TW162
Body Length	12'0"	14'0"	16'0"
Body Width	6'0"	6'0"	6'0"
Overall Length	16'0"	18'0"	20'0"
Overall Width (Includes Fenders)	7'10"	7'10"	7'10"
Overall Height	7'9"	7'9"	7'9"
Interior Length	11'9"	13'9"	15'9"
Interior Width	5'9"	5'9"	5'9"
Interior Height	6'0"	6'0"	6'0"
Platform Height	19"	19"	19"
Axles	Tandem	Tandem	Tandem
Axle Type	4" Drop	4" Drop	4" Drop
Suspension	Torflex®	Torflex®	Torflex®
Tire Size	15"	15"	15"
Load Range	C	C	C
Wheel Bolt Pattern	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5
Hitch Ball Size	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "
Hitch to Top of Ball	18"	18"	18"
Hitch Weight (% of Curb Weight)	10-15%	10-15%	10-15%
Curb Weight (lb.)	1615	1675	1735
GVWR (lb.)	7700	7700	7700
GAWR (lb.)	7000	7000	7000
Average Payload Capacity (lb.)	6085	6025	5965
Cubic Capacity (Cubic Ft.)	405	474	543
Rear Door Style	Double	Double	Double
Rear Door Opening Width	64 ¹ / ₂ "	64 ¹ / ₂ "	64 ¹ / ₂ "
Rear Door Opening Height	63"	63"	63"

Specifications and features subject to change without notice.



Features optional equipment available at additional charge.

STANDARD FEATURE CHECKLIST:

- ☐ Torflex® Rubber Torsion Axles with E-Z Lube Hubs
- ☐ 15" Radial Tires
- ☐ 5-Bolt Silver Spoke Wheels (E-Coated)
- ☐ 4-Wheel Electric Brakes featuring Dexter® Nev-R-Adjust
- ☐ Double Rear Doors
- ☐ Radius Pre-Framed Side Entry Door with Flush Lock & Dead Bolt
- ☐ One-Piece Seamless Aluminum Roof
- ☐ 24" Aluminum Tread Plate Stoneguard
- ☐ Smooth Aluminum Fenders (mill finished)
- ☐ .030 Prefinished Smooth Aluminum Exterior Bonded (No Screws)
- ☐ 12v Dome Lights (2) with Wall Switch
- ☐ LED Exterior Lighting
- ☐ Wells Cargo LED Safety Package
- ☐ Extruded Aluminum Bottom Trim with Anodized Finish
- ☐ Extruded Aluminum Roof Cove/Drip Rail with Anodized Finish
- ☐ All Aluminum "Anti-Rack" Cam Lock with Stainless Steel Hasp
- ☐ 1/4" Plywood Interior Sidewall
- ☐ 3/4" Plywood Flooring
- ☐ 12v End Connector (7-way plug)
- ☐ Jack Ram Hoist with Sand Pad
- ☐ 2⁵/₁₆" Positive Lock Ball Coupler
- ☐ Breakaway System with Wet Cell Battery
- ☐ D.O.T. Safety Chains with Hooks

OPTIONS



Swing-Out Light




Ramp Door Extension



Aerodynamic Nose Cone®



Roof Mounted Storage

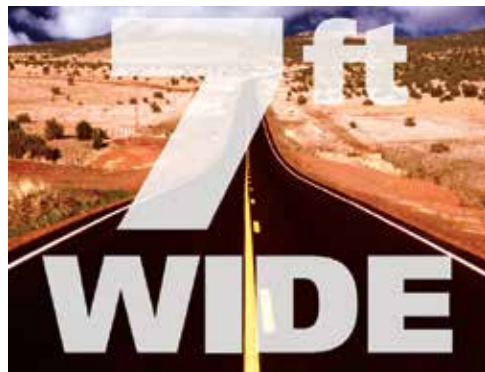

cargoWagon®

10

At home on the job.

Day after day, job after job, year after year, the cargoWagon proves that it's built to go the distance . . . and then some! Go ahead. Put us to the test. We're confident you won't find a longer lasting trailer than a Wells Cargo cargoWagon. You can achieve that kind of durability when you focus on building a better trailer, rather than cutting corners. Everyday is an ongoing challenge to improve our manufacturing processes assuring you get the most trailer for your hard earned dollar. We've been doing it for over 50 years and we're not about to change now. After all, striving for quality is a hard habit to break. Models shown feature standard 102" wide axles with a flush floor – no obstructions to hinder loading. Models with 96" overall width (with interior wheel boxes) also available.



Features optional equipment available at additional charge.



STANDARD FEATURE CHECKLIST:

- ☐ Torflex® Rubber Torsion Axles (4" Drop)
- ☐ 15" Radial Tires
- ☐ 5-Bolt Silver Spoke Wheels (E-Coated)
- ☐ 4-Wheel Electric Brakes featuring Dexter® Nev-R-Adjust
- ☐ Double Rear Doors
- ☐ Radius Pre-Framed Side Entry Door with Flush Lock & Dead Bolt
- ☐ One-piece Seamless Aluminum Roof
- ☐ 24" Aluminum Tread Plate Stoneguard
- ☐ Smooth Aluminum Fenders (mill finished)
- ☐ .030 Prefinished Aluminum Exterior
- ☐ 12v Dome Lights (2) with Wall Switch
- ☐ LED Exterior Lighting
- ☐ Wells Cargo LED Safety Package
- ☐ Extruded Aluminum Bottom Trim with Anodized Finish
- ☐ Extruded Aluminum Roof Cove/Drip Rail with Anodized Finish
- ☐ All Aluminum "Anti-Rack" Cam Lock with Stainless Steel Hasp
- ☐ 1/4" Plywood Interior Sidewall
- ☐ 3/4" Plywood Flooring
- ☐ 12v End Connector (7-way plug)
- ☐ Jack Ram Hoist with Sand Pad
- ☐ Positive Lock Ball Coupler (see specs. for size)
- ☐ Breakaway System with Wet Cell Battery
- ☐ D.O.T. Safety Chains with Hooks



Special thanks to Wasatch Front — Sound Dance and Recording Co. (1-800-370-1301) Clearfield, UT

OPTIONS



Rear Roll-Up Door



E-Track (Wall & Floor)



Exterior Halogen Spotlight




ABS Hub Covers & Trim Rings



Features optional equipment available at additional charge.

DIMENSIONS V-Front cargoWagon®

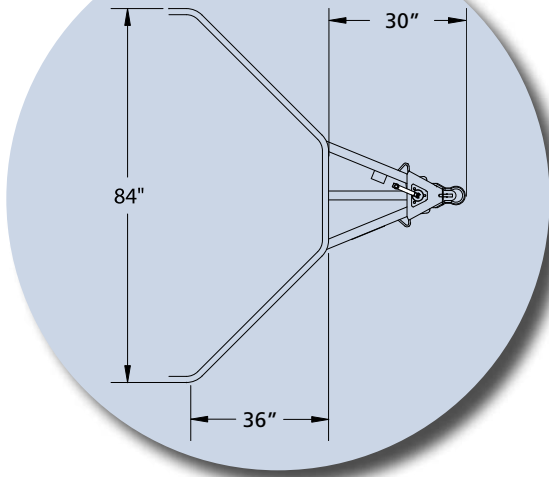

cargoWagon® V-FRONT SPECS


SPECIFICATION CATEGORY	INCREASES STANDARD MEASUREMENT BY:
Body Length	+36"
Overall Length	+18"
Curb Weight:	+150 lb.

SPECIFICATIONS cargoWagon®

MODEL	CW121-102	CW141-102	CW1222-102	CW1422-102	CW1622-102	CW1822-102	CW2022-102
Body: Length	12'0"	14'0"	12'0"	14'0"	16'0"	18'0"	20'0"
Width	7'0"	7'0"	7'0"	7'0"	7'0"	7'0"	7'0"
Overall: Length	16'0"	18'0"	16'0"	18'0"	20'0"	22'0"	24'0"
Width (Flush floor includes Fenders) *	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
Height	7'10"	7'10"	7'10"	7'10"	7'10"	8'0"	8'0"
Interior: Length	11'9"	13'9"	11'9"	13'9"	15'9"	17'9"	19'9"
Width	6'9"	6'9"	6'9"	6'9"	6'9"	6'9"	6'9"
Height	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"
Platform Height	19"	19"	19"	19"	19"	21"	21"
Axles	Single	Single	Tandem	Tandem	Tandem	Tandem	Tandem
Axle Type	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
Suspension	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
Tire Size	15"	15"	15"	15"	15"	15"	15"
Load Range	C	C	C	C	C	C	C
Wheel Bolt Pattern	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5
Hitch Ball Size	2"	2"	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "
Hitch to Top of Ball	18"	18"	18"	18"	18"	20"	20"
Hitch Weight (% of Curb Weight)	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	1600	1700	1870	1970	2070	2390	2570
GVWR (lb.)	3850	3850	7700	7700	7700	7700	7700
GAWR (lb.)	3500	3500	7000	7000	7000	7000	7000
Avg. Payload Capacity (lb.)	2250	2150	5830	5730	5630	5310	5130
Cubic Capacity (Cubic Ft.)	475	556	475	556	637	718	799
Rear Doors	Double	Double	Double	Double	Double	Double	Double
Rear Door Opening:							
Width	76 ¹ / ₂ "	76 ¹ / ₂ "	76 ¹ / ₂ "	76 ¹ / ₂ "	76 ¹ / ₂ "	76 ¹ / ₂ "	76 ¹ / ₂ "
Height	63"	63"	63"	63"	63"	63"	63"

*cargoWagon models with 96" overall width (including fenderettes) with interior wheel boxes also available at no additional charge.

Specifications and features subject to change without notice.

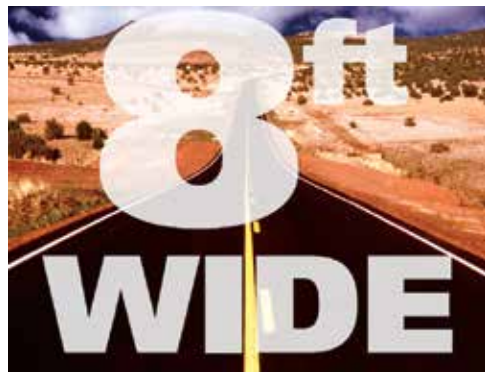

Express Wagon®

It takes everything you've got!

Big jobs. You know, the ones that others back away from. Not the rugged Express Wagon. It was designed specifically for the tough assignments. Extra attention has been given to assure the highest performance and longest service life. Our chassis and frame design are the envy of the industry. We have literally

thousands of trailers still in service after 20+ years . . . that's more years than most of our competition has been in business! A wide selection of lengths, payloads, and customizing options mean you can find the right trailer for the business at hand. For even more cubic capacity, add the optional Wide Body configuration with a generous 95" interior width. Sometimes bigger is better.



Special thanks to TimberLodge Collection (U & I Furniture) Ogden, UT

OPTIONS



Stabilizer Jacks



Sub-Floor Tire Carrier



AlumaSport™ Wheels (Wells Cargo Exclusive)



On-Board Generator

SPECIFICATIONS

2-Ton Express Wagon®



MODEL	EW1222	EW1622	EW2022	EW2422
Body:				
Length	12'0"	16'0"	20'0"	24'0"
Width	7'9"	7'9"	7'9"	7'9"
Overall:				
Length	16'0"	20'0"	24'0"	28'0"
Width <i>(Includes Fenderettes)</i>	8'6"	8'6"	8'6"	8'6"
Height	8'5"	8'5"	8'5"	8'5"
Interior:				
Length	11'9"	15'9"	19'9"	23'9"
Width	7'6"	7'6"	7'6"	7'6"
Height	6'6"	6'6"	6'6"	6'6"
Platform Height:				
Wheel Boxes	21"	21"	21"	21"
Flush Floor	34"	34"	34"	34"
Axles	Tandem	Tandem	Tandem	Tandem
Axle Type	4" Drop	4" Drop	4" Drop	4" Drop
Suspension	Torflex®	Torflex®	Torflex®	Torflex®
Tire Size	15"	15"	15"	15"
Load Range	C	C	C	C
Wheel Bolt Pattern	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5
Hitch Ball Size	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "
Hitch to Top of Ball	19"	19"	19"	19"
Hitch Weight <i>(% of Curb Weight)</i>	10-15%	10-15%	10-15%	10-15%
Curb Weight <i>(lb.)</i>	2080	2370	2660	2950
GVWR <i>(lb.)</i>	7700	7700	7700	7700
GAWR <i>(lb.)</i>	7000	7000	7000	7000
Avg. Payload Capacity <i>(lb.)</i>	5620	5330	5040	4750
Cubic Capacity <i>(Cubic Ft.)</i>	572	767	962	1157
Rear Doors	Double	Double	Double	Double
Rear Door Opening:				
Width	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "
Height	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "

STANDARD FEATURES CHECKLIST:

- ☐ Torflex® Rubber Torsion Axles (4" Drop)
- ☐ Radial Tires
- ☐ Silver Spoke Wheels (E-Coated)
- ☐ 4-Wheel Electric Brakes featuring Dexter® Nev-R-Adjust
- ☐ Double Rear Doors
- ☐ Radius Pre-Framed Side Entry Door with Flush Lock & Dead Bolt
- ☐ One-piece Seamless Aluminum Roof
- ☐ 24" Aluminum Tread Plate Stoneguard
- ☐ Smooth Aluminum Fenderettes (mill finished)
- ☐ .030 Prefinished Aluminum Exterior
- ☐ 12v Dome Lights (2) with Wall Switch
- ☐ LED Exterior Lighting
- ☐ Wells Cargo LED Safety Package
- ☐ Extruded Aluminum Bottom Trim with Anodized Finish
- ☐ Extruded Aluminum Roof Cove/Drip Rail with Anodized Finish
- ☐ All Aluminum "Anti-Rack" Cam Lock with Stainless Steel Hasp
- ☐ 1/4" Plywood Interior Sidewall
- ☐ 3/4" Plywood Floor
- ☐ 12v End Connector (7-way plug)
- ☐ Jack Ram Hoist with Sand Pad
- ☐ 2⁵/₁₆" Positive Lock Ball Coupler
- ☐ Breakaway System with Wet Cell Battery
- ☐ D.O.T. Safety Chains with Hooks


NOTE: 7 Ton Express Wagon models with 17,600 lb. GVWR are available. See local Wells Cargo dealer for details.

SPECIFICATIONS

4-Ton Express Wagon® & 5-Ton Express Wagon®

MODEL	EW1224	EW1624	EW2024	EW2424	EW2824	EW3224	EW1225	EW1625	EW2025	EW2425	EW2825	EW3225
Body:												
Length	12'0"	16'0"	20'0"	24'0"	28'0"	32'0"	12'0"	16'0"	20'0"	24'0"	28'0"	32'0"
Width	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"
Overall:												
Length	16'0"	20'0"	24'0"	28'0"	32'0"	36'0"	16'0"	20'0"	24'0"	28'0"	32'0"	36'0"
Width <i>(Includes Fenderettes)</i>	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
Height	8'5"	8'5"	8'5"	8'5"	8'7"	8'7"	8'8"	8'8"	8'8"	8'8"	8'8"	8'8"
Interior:												
Length	11'9"	15'9"	19'9"	23'9"	27'9"	31'9"	11'9"	15'9"	19'9"	23'9"	27'9"	31'9"
Width	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
Height	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"
Platform Height:												
Wheel Boxes	21"	21"	21"	21"	23"	23"	24"	24"	24"	24"	24"	24"
Flush Floor	34"	34"	34"	34"	36"	36"	37"	37"	37"	37"	37"	37"
Axles	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Axle Type	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
Suspension	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
Tire Size	15"	15"	15"	15"	15"	15"	16"	16"	16"	16"	16"	16"
Load Range	D	D	D	D	D	D	D	D	D	D	D	D
Wheel Bolt Pattern	6-Bolt/5.5	6-Bolt/5.5	6-Bolt/5.5	6-Bolt/5.5	6-Bolt/5.5	6-Bolt/5.5	8-Bolt/6.5	8-Bolt/6.5	8-Bolt/6.5	8-Bolt/6.5	8-Bolt/6.5	8-Bolt/6.5
Hitch Ball Size	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "
Hitch to Top of Ball	19"	19"	19"	19"	21"	21"	22"	22"	22"	22"	22"	22"
Hitch Weight <i>(% of Curb Weight)</i>	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight <i>(lb.)</i>	2405	2695	2985	3275	4245	4620	2850	3225	3600	3975	4350	4725
GVWR <i>(lb.)</i>	10,000	10,000	10,000	10,000	10,000	10,000	13,200	13,200	13,200	13,200	13,200	13,200
GAWR <i>(lb.)</i>	10,000	10,000	10,000	10,000	10,000	10,000	12,000	12,000	12,000	12,000	12,000	12,000
Avg. Payload Capacity <i>(lb.)</i>	7595	7305	7015	6725	5755	5380	10,350	9975	9600	9225	8850	8475
Cubic Capacity <i>(Cubic Ft.)</i>	572	767	962	1157	1352	1547	572	767	962	1157	1352	1547
Rear Doors	Double	Double	Double	Double	Double	Double	Double	Double	Double	Double	Double	Double
Rear Door Opening:												
Width	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "
Height	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "

Specifications and features subject to change without notice.

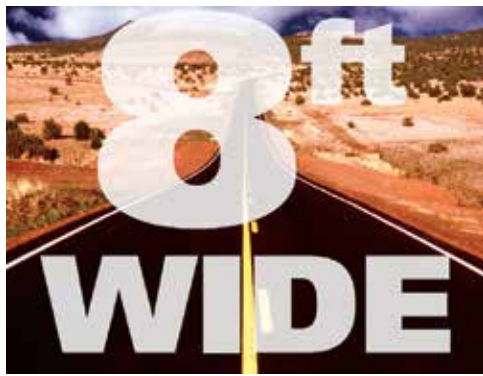

Express Wagon®

14



Features optional equipment available at additional charge.

OPTIONS



Fluorescent Lighting



Tinted Radius Windows



Workbench

SPECIFICATIONS


2-Ton V-Front Express Wagon®

MODEL	EW1222-V	EW1622-V	EW2022-V	EW2422-V
Body: Length	15'0"	19'0"	23'0"	27'0"
Width	7'9"	7'9"	7'9"	7'9"
Overall: Length	17'6"	21'6"	25'6"	29'6"
Width <i>(Includes Fenderettes)</i>	8'6"	8'6"	8'6"	8'6"
Height	8'5"	8'5"	8'5"	8'5"
Interior: Length	14'9"	18'9"	22'9"	26'9"
Width	7'6"	7'6"	7'6"	7'6"
Height	6'6"	6'6"	6'6"	6'6"
Platform Height: Wheel Boxes	21"	21"	21"	21"
Flush Floor	34"	34"	34"	34"
Axles	Tandem	Tandem	Tandem	Tandem
Axle Type	4" Drop	4" Drop	4" Drop	4" Drop
Suspension	Torflex®	Torflex®	Torflex®	Torflex®
Tire Size	15"	15"	15"	15"
Load Range	C	C	C	C
Wheel Bolt Pattern	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5
Hitch Ball Size	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "
Hitch to Top of Ball	19"	19"	19"	19"
Hitch Weight (% of Curb Weight)	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	2250	2540	2830	3120
GVWR (lb.)	7700	7700	7700	7700
GAWR (lb.)	7000	7000	7000	7000
Avg. Payload Capacity (lb.)	5450	5160	4870	4580
Cubic Capacity (Cubic Ft.)	645	840	1035	1230
Rear Doors	Double	Double	Double	Double
Rear Door Opening: Width	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "
Height	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "



DIMENSIONS

V-Front Express Wagon®

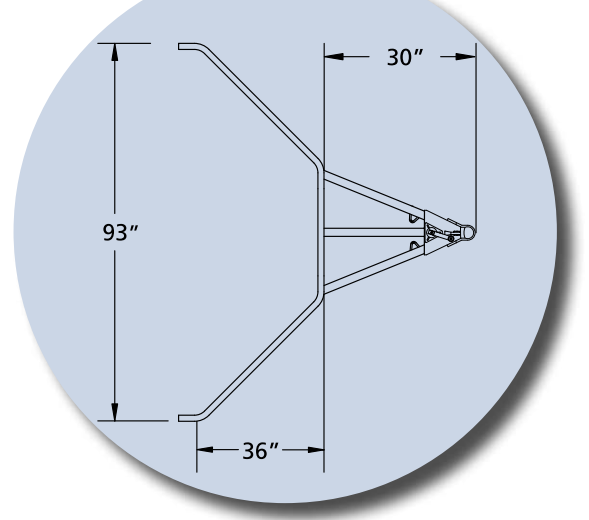

NOTE: 7-Ton V-Front Express Wagon models with 17,600 lb. GVWR are available. See local Wells Cargo dealer for details.

SPECIFICATIONS

4-Ton V-Front Express Wagon® & 5-Ton V-Front Express Wagon®

MODEL	EW1224-V	EW1624-V	EW2024-V	EW2424-V	EW2824-V	EW3224-V	EW1225-V	EW1625-V	EW2025-V	EW2425-V	EW2825-V	EW3225-V
Body: Length	15'0"	19'0"	23'0"	27'0"	31'0"	35'0"	15'0"	19'0"	23'0"	27'0"	31'0"	35'0"
Width	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"	7'9"
Overall: Length	17'6"	21'6"	25'6"	29'6"	33'6"	37'6"	17'6"	21'6"	25'6"	29'6"	33'6"	37'6"
Width <i>(Includes Fenderettes)</i>	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
Height	8'5"	8'5"	8'5"	8'5"	8'7"	8'7"	8'8"	8'8"	8'8"	8'8"	8'8"	8'8"
Interior: Length	14'9"	18'9"	22'9"	26'9"	30'9"	34'9"	14'9"	18'9"	22'9"	26'9"	30'9"	34'9"
Width	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
Height	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"
Platform Height: Wheel Boxes	21"	21"	21"	21"	23"	23"	24"	24"	24"	24"	24"	24"
Flush Floor	34"	34"	34"	34"	36"	36"	37"	37"	37"	37"	37"	37"
Axles	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Axle Type	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
Suspension	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
Tire Size	15"	15"	15"	15"	15"	15"	16"	16"	16"	16"	16"	16"
Load Range	D	D	D	D	D	D	D	D	D	D	D	D
Wheel Bolt Pattern	6-Bolt/5.5	6-Bolt/5.5	6-Bolt/5.5	6-Bolt/5.5	6-Bolt/5.5	6-Bolt/5.5	8-Bolt/6.5	8-Bolt/6.5	8-Bolt/6.5	8-Bolt/6.5	8-Bolt/6.5	8-Bolt/6.5
Hitch Ball Size	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "
Hitch to Top of Ball	19"	19"	19"	19"	21"	21"	22"	22"	22"	22"	22"	22"
Hitch Weight (% of Curb Weight)	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	2575	2865	3155	3445	4415	4790	3020	3395	3770	4145	4520	4895
GVWR (lb.)	10,000	10,000	10,000	10,000	10,000	10,000	13,200	13,200	13,200	13,200	13,200	13,200
GAWR (lb.)	10,000	10,000	10,000	10,000	10,000	10,000	12,000	12,000	12,000	12,000	12,000	12,000
Avg. Payload Capacity (lb.)	7425	7135	6845	6555	5585	5210	10,180	9805	9430	9055	8680	8305
Cubic Capacity (Cubic Ft.)	645	840	1035	1230	1425	1620	645	840	1035	1230	1425	1620
Rear Doors	Double	Double	Double	Double	Double	Double	Double	Double	Double	Double	Double	Double
Rear Door Opening: Width	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "	85 ³ / ₄ "
Height	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "	68 ¹ / ₂ "

Specifications and features subject to change without notice.



SmartFrame Technology™

Sound Design. Solid Performance.

SmartFrame Technology begins with the understanding that the frame, although not very glamorous, is the true source of a trailer's durability. Without a solid foundation, a steel-structured foundation, everything else is just for show. The following pages highlight our SmartFrame Technology approach to trailer design along with many other exclusive features that assure your Wells Cargo will outperform any trailer on the market. We encourage you to compare. You might get a little dirt on your knees, but in the long run you'll be glad you did.



7

Radius Corner Posts

Radius steel corner posts, front and rear, extend to the bottom of the frame providing the maximum welding surface possible. End rails and corner posts welded together both horizontally and vertically and gusseted for long lasting durability.



10

Body Frames & Roof Bows

All door openings are welded with formed steel channel headers and gusseted for rigid anchoring. One-piece roof bows are galvanized steel hat sections welded directly to top sidewall sills. Notched wall posts (see inset) provide smooth, level surface for skin.



30

12v Electrical System


All 12v wiring is completely weather protected with no direct exposure to the elements or road hazards. The molded, 4-wire cable is routed inside the tubular main rail. All brake wiring is run through conduit into a welded channel on the axle.



5

Tubular Steel Main Rail Chassis

The heavy-duty tubular steel main rail used by Wells Cargo is more rigid and less likely to flex compared to "I-Beam" construction offered by other brands. Our full height steel cross members, end rails, and outriggers assure you get the strongest construction on the market.



1



20



35



12

- 1) Torflex® Rubber Torsion Axles with E-Z Lube Hubs
- 2) E-Coated Silver Spoke Wheels
- 3) Goodyear® Radial Tires
- 4) ATP Fenders (Single Axle) or Smooth Aluminum Fenders (Tandem Axle)
- 5) Tubular Steel Main Rails
- 6) Full Height Steel C-channel Crossmembers
- 7) Radius Steel Corner Posts (Front & Rear)
- 8) Galvanized Steel Roof Bows
- 9) Structural Angle Top & Bottom Sills
- 10) Sidewalls with Vertical Wall Hat Posts on 16" Centers
- 11) Electrolysis Barrier
- 12) CPC Undercoating on Complete Chassis



32

NEV-R-ADJUST™

FORWARD SELF-ADJUSTING ELECTRIC BRAKES

- 13) Painted Steel Surfaces include Primer & Urethane Topcoat
- 14) .030 Prefinished Aluminum Exterior
 - ◆ 4', 5' & 6' wide models feature Bonded Panels
 - ◆ 7' and 8' wide models feature Rust Resistance Fasteners
- 15) Extruded Aluminum Roof Cove with Drip Rail (Anodized)
- 16) Extruded Aluminum Bottom Trim (Anodized)
- 17) Seamless Aluminum Roof (8' wide models feature Smooth Galvanized Steel)
- 18) Fiberglass End Caps (Front & Rear)
- 19) Double Rear Doors with Insulated Core Frame, Zinc Plated Steel Strap Hinges & Grease Zerk
- 20) Full Length Aluminum "Anti-Rack" Cam Bar

- 21) Stainless Steel Security Hasp
- 22) 1/4" Plywood Interior Sidewall Liner
- 23) 3/4" Plywood Floor
(Exterior Surface Undercoated, Interior Surface Painted Gray)
- 24) Brake, Clearance & Marker Lights feature 12v LED
(All Exterior Lighting is wired using molded "plug-in" style wiring harnesses for a solid connection.)
- 25) Wells Cargo LED Safety Package
(Clearance Lights on Rear Roof Cap serve as a High Profile Brake Light and Side Clearance Lights serve as Turn Indicators.)
- 26) Lighted License Plate Holder

- 27) Positive Lock Ball Coupler Hitch with Replaceable "Locking Dog"
- 28) Top-Crank Jack with Sand Pad
- 29) Easy Access Junction Box
- 30) Weather-Protected 12v Wiring
- 31) D.O.T. Wet Cell Battery
- 32) Dexter® Nev-R-Adjust Brakes
(Standard on trailers equipped with electric brakes — 3500 lb. to 8000 lb. axles)
- 33) Side Entry Door
- 34) ATP Stoneguard
- 35) Dome Light(s) with Wall Switch



NOTE: Shown with optional Side Entry Door and ATP Stone Guard.
Standard features, specifications & dimensions subject to change without notice.




Options, Upgrades & Customizing

Every Wells Cargo enclosed cargo trailer is jam-packed with a laundry list of quality standard features. From a practical point of view, that's what you want. However, the real thrill comes from taking that dream trailer concept in your head and turning it into a reality. Wells Cargo has the selection, the resources, and the experience to build your cargo trailer just the way you want it. Do you like to stand out of the crowd? Choose from hundreds of striking exterior options. Or, maybe you're more of a "Do-It-Yourself" kind of person and prefer a garage on wheels. We can do that, too. Check out our generous assortment of interior upgrades that will really make you feel at home. It doesn't matter the size or the application, Wells Cargo is up to the challenge.



LED Backup Light




Roof Vent with Exhaust Fan



Spare Tire Carrier (Exterior)




Roof Vent Cover



Skid-Resistant Vinyl Flooring



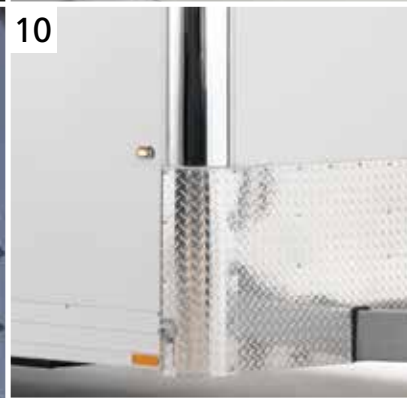

1. Roll-Out Awning
2. Spare Tire Carrier (Interior)
3. Recessed Step
4. Overhead Cabinet with 34,000 BTU Furnace, Vinyl Lined Ceiling & Dome Light
5. Overhead Cabinet
6. Aluminum Ladder
7. 12-Volt Power Jack Ram Hoist
8. Air Conditioner (Roof Mounted)
9. Telescoping Exterior Light
10. ATP Stone Guard & Anodized Corners



.030 Prefinished Aluminum Skin



White



Victory Red



Black



Pewter



Indigo Blue



Champagne



Yellow*



Beige



Charcoal Gray



Silver Frost



Orange*



Dark Green

*Upgrade Colors

Skin colors shown are representative only. See your dealer for accurate samples.

EXTERIOR COLORS

Wells Cargo and Our Legacy of Engineering Leadership



Many people say that all enclosed trailers look pretty much alike. We consider that a compliment since it was Wells Cargo who pioneered the industry over 60 years ago. State-of-the-art takes on a whole new meaning when you compare the first trailer we built in 1954 with our product line today. Old "No. 1" looked pretty good back then, but we've come a long way since. Experience has made the difference and ours is unmatched. Our Research & Development facilities keep us the frontrunners of the industry. After thorough evaluation and comparison, we think you'll agree that Wells Cargo has earned our long standing reputation as the premium cargo trailer on the market and the best overall investment.

Rest assured that after you make the decision to buy a Wells Cargo, our commitment to you is not over. Our comprehensive 6-Year "Never Look Back" Warranty Program is more than just words. It's about how quickly and responsibly we respond to your needs. It's the peace-of-mind you get knowing your investment is protected by an established company with a solid reputation. If our work or materials are at fault, we'll make it right. Any one of our four manufacturing facilities or our national network of professional dealers stand ready to service your trailer should the unlikely need arise.



 BY UNIVERSAL TRAILER

www.wellscargo.com

More Great Trailers

For **WORK**, durable Wells Cargo trailers are used every day by Contractors, Landscapers, Fire Departments, Utility Companies, Heavy and Light Industry; anywhere value of investment is critical.

For **FUN**, you'll see Wells Cargo trailers carrying race cars, collector cars, snowmobiles, motorcycles, ATV's, antiques, and recreational/sporting equipment; anywhere reliable service and carefree towing is a must. You'll see Wells Cargo trailers pulled by big trucks, little trucks, passenger cars, and motorhomes.

You'll find Wells Cargo trailers in almost any situation requiring dependable, economical transportation and storage.



Ask about our
Customer Care Program



AUTHORIZED WELLS CARGO DEALER



©Wells Cargo, Inc. 2005 LITHO USA Form CARGO 400R0514

Elkhart, IN
McAdoo, PA

Ogden, UT
Waco, TX